

MIPOLAM BIOCONTROL

Cleanroom Flooring

industrybygerflor.com



Gerflor[®]
theflooringgroup



- **Certified for use in ISO-3 cleanrooms**
- *Certifié pour un usage en salles propres ISO-3*
- Zertifiziert für ISO-3 Reinräume



- **Extreme Resistance to Chemicals**
- *Excellente résistance aux agressions chimiques*
- Sehr hohe chemische Beständigkeit



- **Certified for use in GMP Class A cleanrooms**
- *Certifié pour un usage en salles propres BPF-Classe A*
- Zertifiziert für GMP-Klasse A Reinräume



- **Resistance to Heavy Traffic**
- *Résistance aux charges lourdes*
- Fahrdynamisch hochbelastbar



DESCRIPTION

Total thickness	-	EN ISO 24346 [EN 428]	mm	2 (0.08")	2 (0.08")
Roll Width / Length	-	EN ISO 24341 [EN 426]	m	2 x 20 (6' 6" x 66')	2 x 20 (6' 6" x 66')
Tile Format*	-	EN ISO 24342 [EN 427]	mm	608 x 608 (23.9" x 23.9")	608 x 608 (23.9" x 23.9")

CLASSIFICATION

Fire Rating	-	EN 13501-1	class	B _{fl} -s1	B _{fl} -s1
Fire Rating	-	ASTM E 648	class	Class 1	Class 1
Slip Resistance	-	DIN 51 130	class	R9	R9
Coefficient of Friction	-	ASTM D 2047	-	0.56 (exceeds)	0.56 (exceeds)
Coefficient of Friction	-	ASTM C 1028	-	Meets Requirements	Meets Requirements
European Classification	-	EN ISO 10874 [EN 685]	class	34-43	34-43
Reference specification	-	ASTM F1913 EN 14041	-	Meets Requirements	Meets Requirements
Maximum Static Load Limit	-	ASTM F970	-	-.002" under 250 psi Up to 2000 psi	-.002" under 250 psi Up to 2000 psi

PERFORMANCE

Particulate Emission	Fraunhofer Method	ISO 14644-1	-	ISO 3	ISO 4
Air Chemical Cleanliness	ISO 16000-6,-9,-11	ISO 14644-8	µg/m ² /hr	TVOC = unmeasurable (at 23°C) ACCm/AMCm ≤ 9.6	TVOC = 4.7 (at 23°C)
Anion Emission	Fraunhofer Method	ISO 14644-8	µg/m ² /hr	Unmeasurable (at 23°C)	155 (at 23°C)
Ammonium N Emission	ISO 11732	ISO 14644-8	µg/m ² /hr	Unmeasurable (at 23°C)	Unmeasurable (at 23°C)
Static Electrical Propensity	EN 61340-4-5	EN 61340-5-1	kV	Antistatic <2	Antistatic <2
Electrical Resistance	EN 61340-4-1	EN 61340-5-1	Ω	Insulating >10 ¹¹	Insulating >10 ¹¹
Particulate Cleanability	Fraunhofer Method	VDI 2083 part 9.1 ISO14644-9	%	98.6% reduction in particulate contamination	85.66% reduction in particulate contamination
Biological Cleanability	Fraunhofer Method	ISO14698-1/GMP	classification	A-B	A-C
Action of micro-organism on the flooring	ISO 846	GMP	classification	Inert and resistant	Inert and resistant
Development of micro-organism on the flooring	ISO 846	ISO14698-1/GMP	classification	Bacteriostatic	Bacteriostatic
Chemical Resistance	ISO 2812-1	ISO14644-4/GMP	-	Excellent	Very good
Resistance to gaseous H ₂ O ₂ (HPV)	BIOQUELL Method	ISO14644-4/GMP	-	No damage	No damage

* Tiles available for a minimum order quantity of 500m²

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.



Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.



MIPOLAM BIOCONTROL PERFORMANCE



BP-6027 ACACIA




BP-6008 CALICO



BP-6006 BLUE SKY



BP-6009 GREY STONE

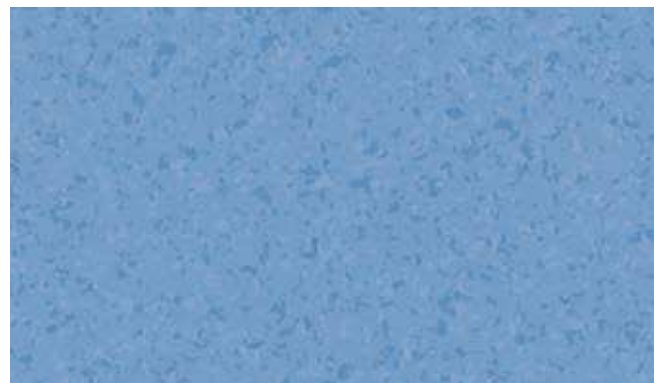

BP-6016 SEA BLUE



BP-6029 CLOUD



BP-6044 SEA STORM



Recommended for heavy traffic areas / *Recommandé pour zones de trafic intense* /
Für Bereiche mit höchster Beanspruchung

BP = Mipolam Biocontrol Performance
B = Mipolam Biocontrol



BP-6031 BREEZE



BP-6001 COTTON



BP-6041 CLAY



BP-6032 SUNSHINE



BP-6039 PEBBLE



BP-6035 SUNSET




BP-6043 WOOD




BP-6055 TOMATO


MIPOLAM BIOCONTROL

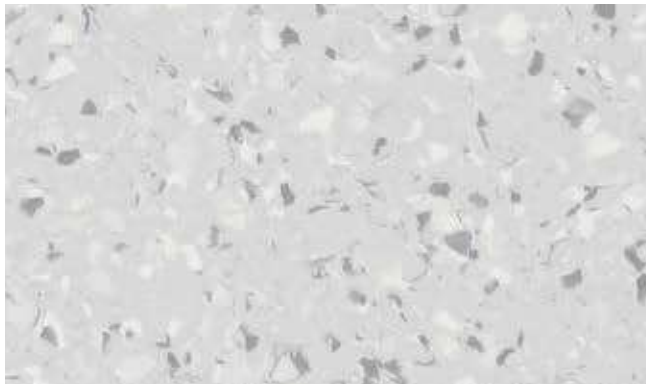

B-5312 WHITE PEPPER

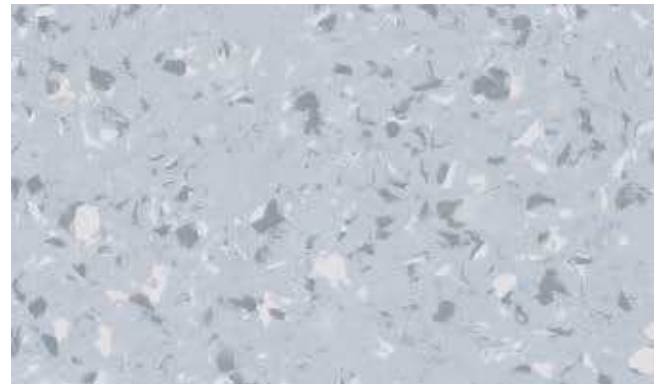


B-5310 MIXDIM

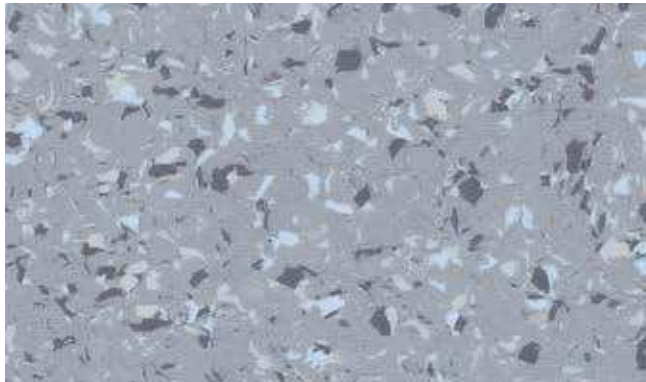


B-5320 MIXGREY




B-5306 MIXBLUE

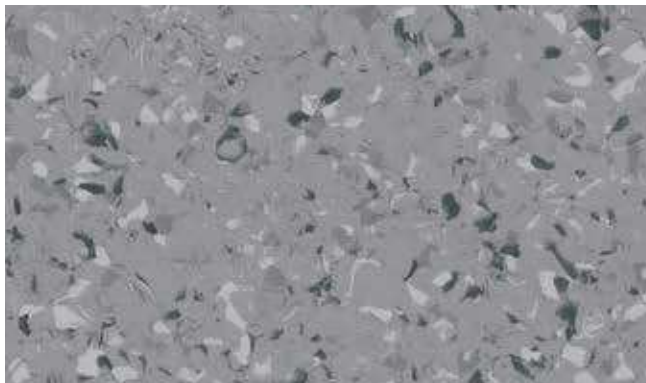

B-5330 SMOKE

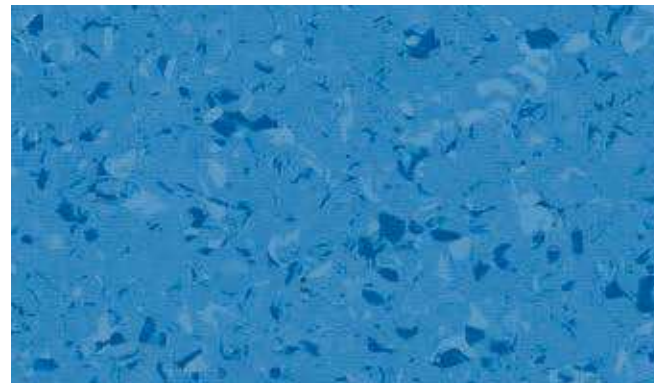

B-5366 IRIS

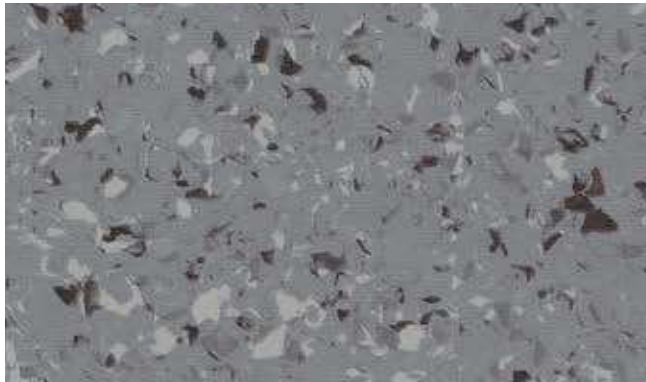

B-5350 SLATE



B-5356 INDIGO



Recommended for heavy traffic areas / *Recommandé pour zones de trafic intense* /
Für Bereiche mit höchster Beanspruchung

BP = Mipolam Biocontrol Performance
B = Mipolam Biocontrol



B-5305 GARLIC



B-5303 MIXBEIGE



B-5341 PEANUT



B-5332 TURMERIC



B-5363 CINNAMON



B-5385 SAFRAN



B-5347 CHERVIL



B-5375 PAPRIKA

GERFLOR INTERNATIONAL (Other countries)
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: industry@gerflor.com

ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 2970 800-0 - Fax: +43 (0)72 2970 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbel@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor - Service Express:
 0 810 569 569  0 810 569 570
e-mail: contactfrance@gerflor.com - industry@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Kunden-Service
Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100
e-mail: kundenservice@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 13 847 1779 - Fax: +966 13 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

POLAND: Gerflor Polska Sp z o.o.
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorrussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor North America
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com

industrybygerflor.com
industry@gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Be CONNECTED!



Follow us on LinkedIn



industrybygerflor.fr

GERFLOR, ECO-RESPONSIBLE SOLUTIONS



COMPOSITION
100% REACH compliant
FREE of formaldehyde
FREE of heavy metals
FREE of solvent



RECYCLED CONTENT
25% average recycled content
100% REACH compliant recycled content



RECYCLABILITY
100% recyclable product



INDOOR AIR QUALITY
TVOC emissions between 10 and 100 times better than norms requirements
Floorscore certified
No formaldehyde emission



INSTALLATION
Innovative adhesive free installation systems



LCA
- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 and Iso 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)



WELLNESS
Health: Antibacterial activity (inhibits growth > 99%)
Safety: Anti slip performance
Comfort: Walking comfort and impact noise reduction

Gerflor
theflooringgroup