

# GRABOSAFE SILVER KNIGHT



HIGH PERFORMANCE  
SAFETY  
FLOOR COVERING


## PERFORMANCE, FEATURES & BENEFITS

Destroys harmful bacteria, Excellent slip resistance, Durability, Premium viies backing, Flexibility, 10 year warranty

## RECOMMENDED USAGE

Healthcare | Education | Entrances | Receptions  
Corridors | Ramps | Elevators | Kitchens

## CONSTRUCTION

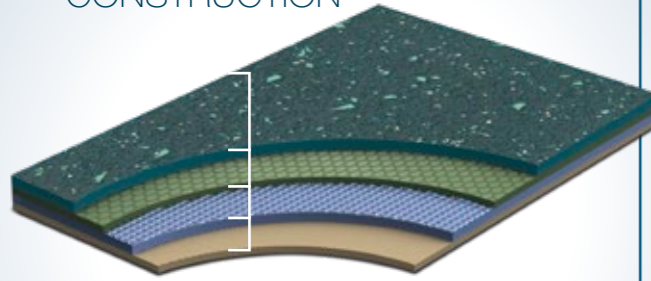

- Silver Knight
- Tech Surface wear layer
- PVC Layer
- Glass fibre reinforcement
- Flexyback®
- non-woven backing


DESCRIPTION		
Construction		compact heterogeneous
Total thickness	EN ISO 24346	2,0 mm
Wear layer thickness	EN ISO 24340	0,7 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,6 kg/m <sup>2</sup>


CLASSIFICATION		
European classification	EN 685	class: 34/43


PERFORMANCE		
Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,1 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	Bfl-s
Slip resistance	RRL Pendulum Test	>36 (wet test)
	DIN 51130	R10
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		Tech Surface
Anti bacterial and fungicid treatment		Silver Knight
Seaming method		hot or cold welding
Warranty		10 year




1193-670/17-279

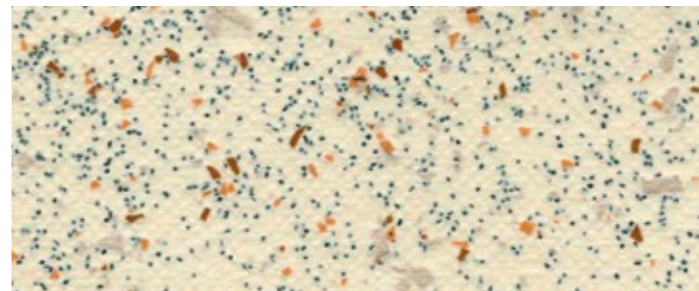

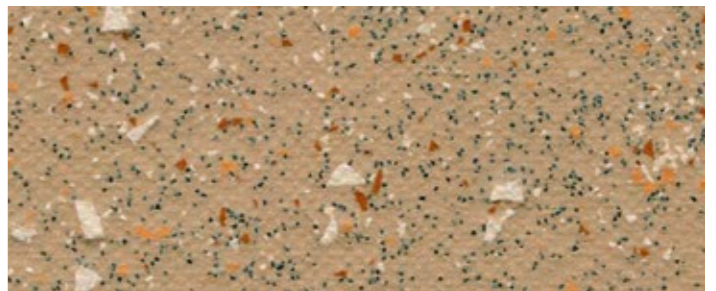
2294-670/17-279

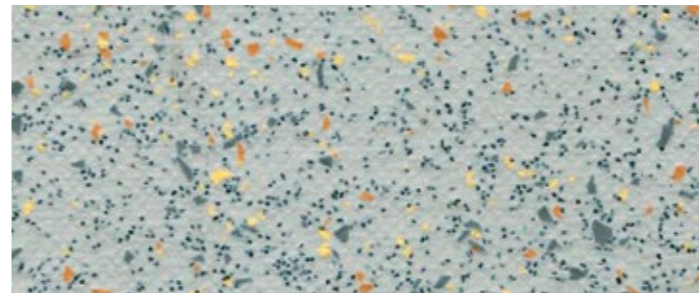


1288-671/17-279

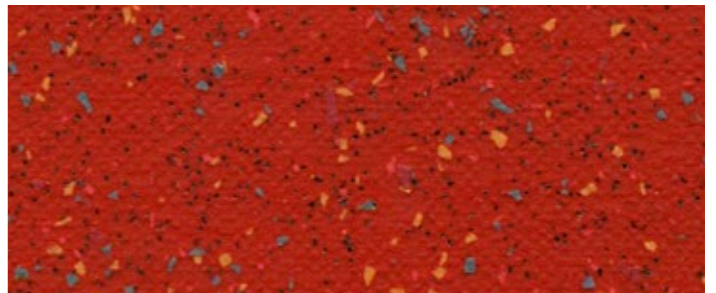


4934-675/17-279

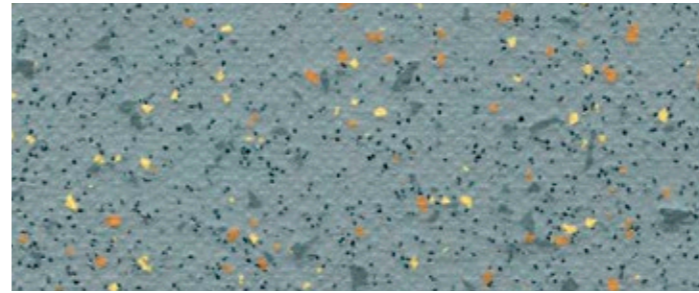


1279-671/17-279

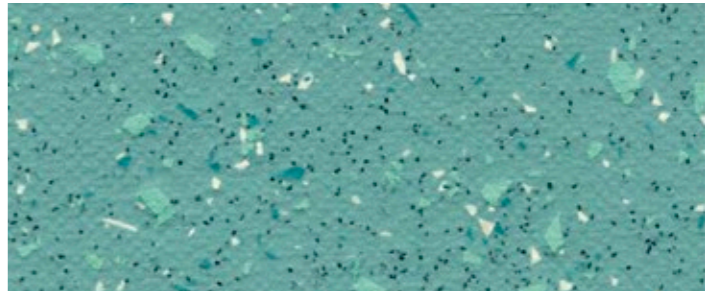


7088-676/17-279

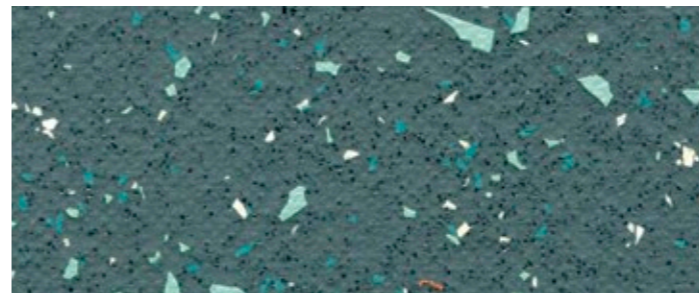


1294-676/17-279

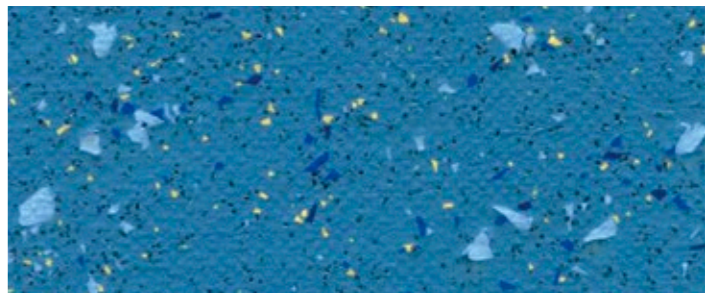

6339-673/17-279

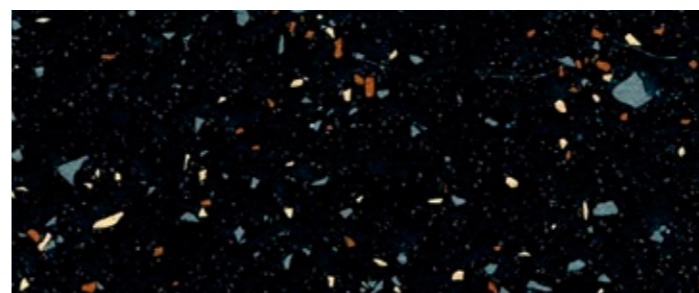

1991-674/17-279

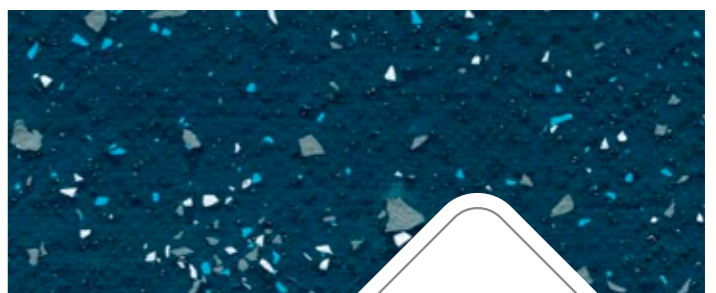

1775-672/17-279

GRABOSAFE  
SILVER KNIGHT




# GRABOSAFE SILVER KNIGHT NATURAL




1001-384-851




1003-384-856

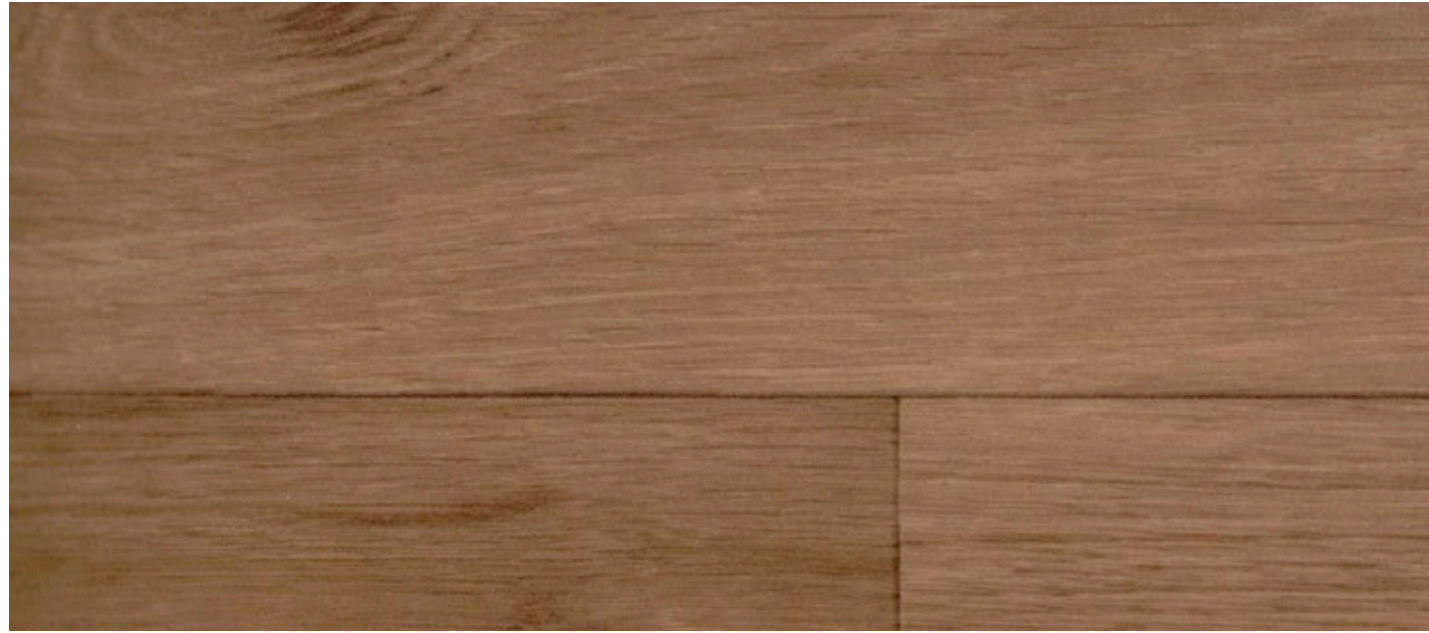


2561-384-867

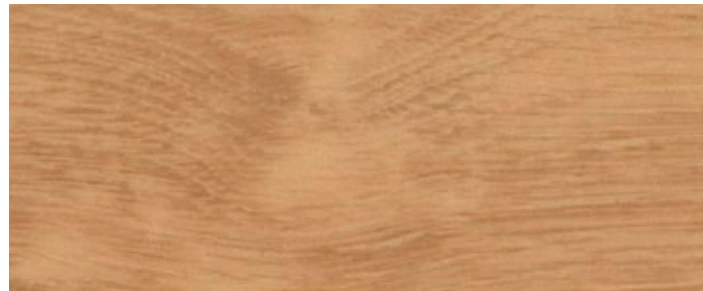

2086-384-855

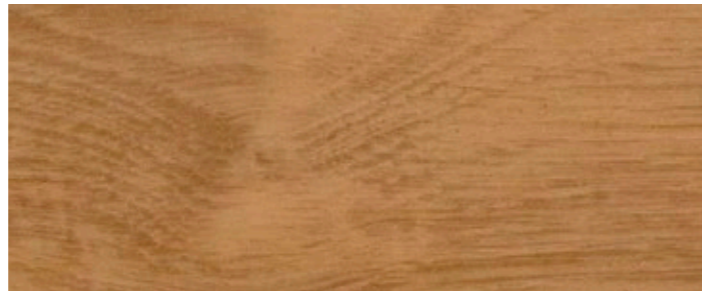

2096-384-857

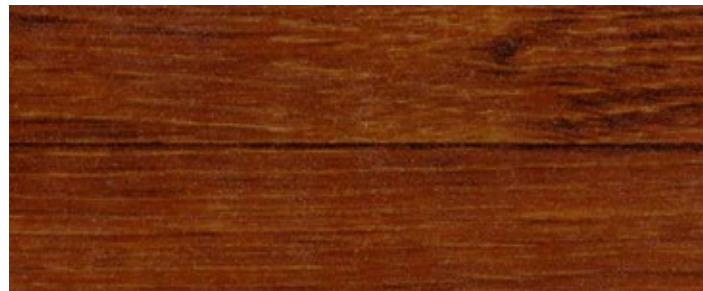

2239-384-868



1243-384-869



GRABOSAFE  
SILVER KNIGHT