


# Interface®

## Oblique

<b>Product definition</b>	Tufted Patterned Structured Loop Tile					
<b>Pile Material</b>	100% BCF Solution Dyed Nylon contains pre-consumer recycled content					
<b>Pile Yarn Weight</b>	712g/m <sup>2</sup> ± 5%					
<b>Total Weight</b>	4479g/m <sup>2</sup> ± 5%					
<b>Pile Height</b>	4.5mm ± 0.3 mm					
<b>Total Thickness</b>	8.0 mm ± 0.5 mm					
<b>Gauge/Ends per 10cm</b>	1/12 - 47.2					
<b>Tufts per m2</b>	186,440 ± 5%					
<b>Backing Type</b>	Graphlex®					
<b>Wear Classification</b>	Heavy Contract (EN 1307)					
<b>Radiant panel</b>	(EN ISO 9239/1) Cfl s1 (EN ISO 13501)					
<b>Dimensional Stability</b>	≤ 0.2% (ISO 2551 / EN 986)					
<b>Impact Sound Insulation (ΔLw)</b>	26dB					
<b>Rating of Sound Absorption</b>	α <sub>w</sub> (EN ISO 11654)					
<b>Sound Absorption</b>	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
	(EN ISO 354) α <sub>s</sub>					
<b>Style number</b>	3670300405			4m <sup>2</sup> - 16 Tiles per Box (50 x 50 cm ± 0.15%)		

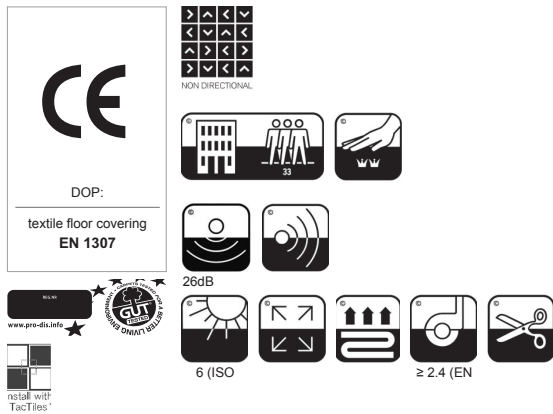

Interface Europe Ltd reserve the right to change or modify specifications

[www.interface.com](http://www.interface.com)



**Mission Zero:**  
our promise to eliminate any negative impact our company may have on the environment by the year 2020.