



## Grabo Triumph vinyl sheet floorcovering specifications

CONSTRUCTION	STANDARDS	TRIUMPH
<b>DESCRIPTION</b>		
Construction	Non-directional homogeneous flooring	
Product specification (Binder content)	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of rolls	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2.9 kg/m <sup>2</sup>
<b>CLASSIFICATION</b>		
European classification	EN ISO 10874	Class 34/43
Residual indentation	EN ISO 24343	max 0.1 mm
Dimensional stability	EN ISO 23999	max 0.4 %
Curling	EN ISO 23999	max. 8 mm
<b>PERFORMANCE</b>		
Abrasion group	MSZ EN 660-1	T
Fire resistance	EN 13501-1	Class: Bfl-s1
Slip resistance	DIN 51130	R9
	EN 13893	Class: DS
Castor chair resistance	EN ISO 4918	✓
Light fastness	EN 20105 B02	grade 6
Thermal resistance	EN 12524	0.012 m <sup>2</sup> K/W
Electrical resistance	EN 1815	< 2 kV / Antistatic
Chemical resistance	EN ISO 26987	✓
Hygiene	Bacterial resistant	
Surface treatment	iGUARD PUR Surface	
Environmental attributes	Phthalate-, solvent and heavy metal free	
Seaming method	heat or cold weld	
Content of PCP	EN 12673	Does not contain
Formaldehyde emission	ENV 717-1	E1 (no emission)

GRABO

TRIUMPH



GRABO

# Triumph

Highly durable homogeneous multipurpose flooring



2018|01



GRABOPLAST  
FLOOR COVERING MANUFACTURERS LTD.  
H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100  
[www.graboplast.com](http://www.graboplast.com)




[www.facebook.com/graboplast](https://www.facebook.com/graboplast)

GRABO

# Triumph

Highly durable homogeneous  
multipurpose flooring

## CONSTRUCTIONS

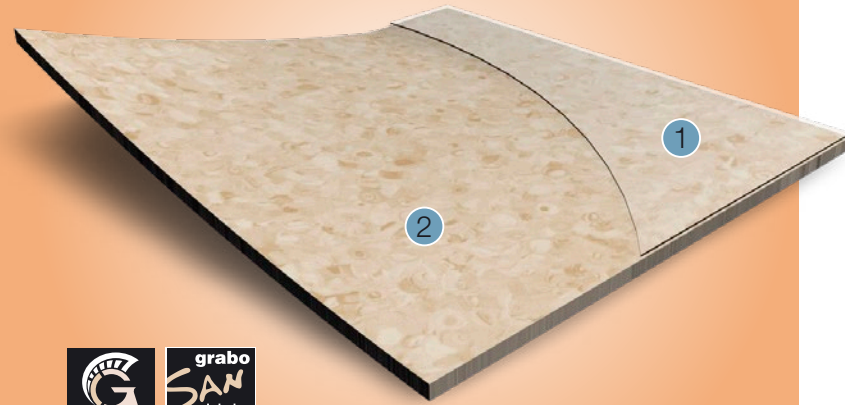

- 1 iGuard PUR Surface
- 2 Non-directional homogeneous layer



### iGuard

#### PUR SURFACE

UV cured, cross linked Polyurethane reinforcement which ensures easy cleaning and durability.

→ NO ADDITIONAL SURFACE TREATMENT NEEDED FOR THE WHOLE LIFETIME OF THE PRODUCT.

## FEATURES & BENEFITS


- Non-directional design
- Ease of cleaning due to iGUARD Surface treatment
- Good chemical protection
- Bacterial resistant surface
- Flexible structure for easy installation

## Ecological Formula



GRABO


Triumph

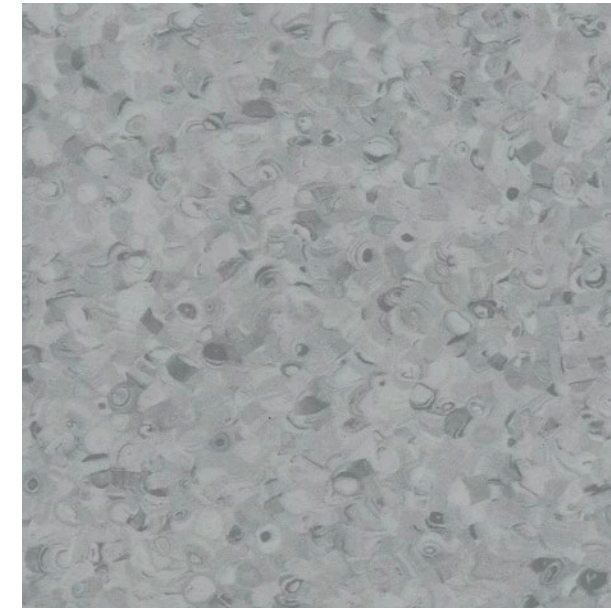


QUARTZ




IVORY

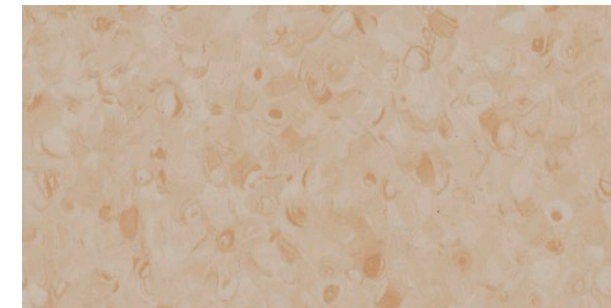


VANILLA

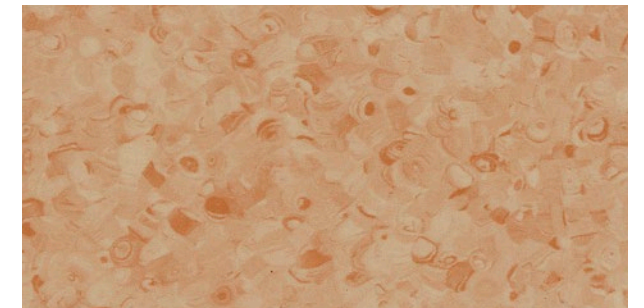


HONEY

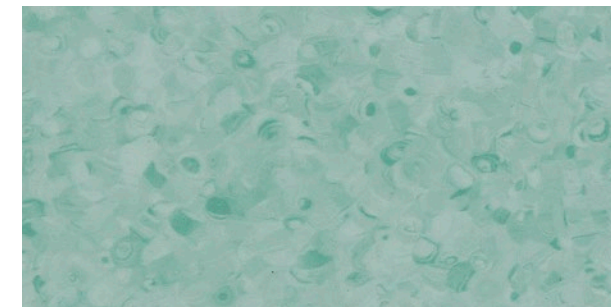


MINT

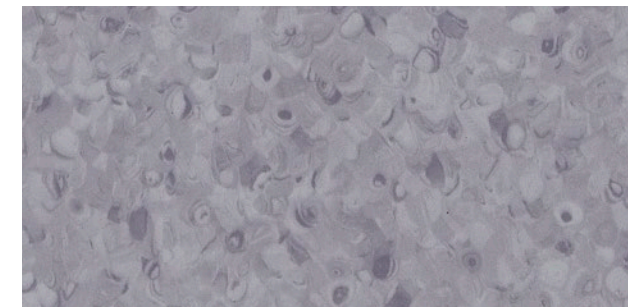

ASH

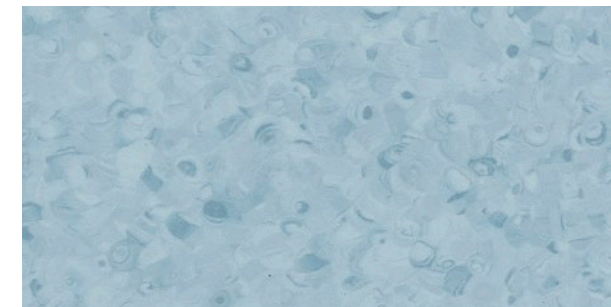

OPAL

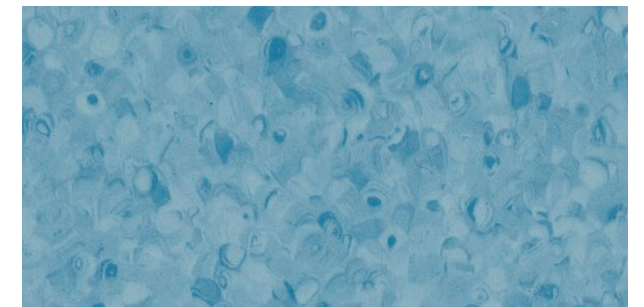

AZURE