

# Interface®


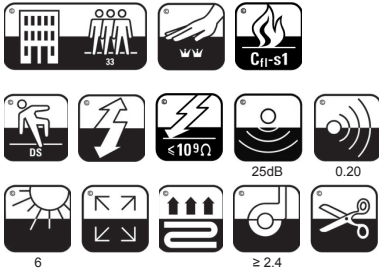
## Knit One Purl One

<b>Product definition</b>	Tufted Patterned Textured Loop Tile						
<b>Pile Material</b>	100% Solution Dyed Nylon contains recycled content						
<b>Pile Yarn Weight</b>	560g/m <sup>2</sup> ± 5%						
<b>Total Weight</b>	4361g/m <sup>2</sup> ± 5%						
<b>Pile Height</b>	3.8 ± 0.5 mm						
<b>Total Thickness</b>	6.5 ± 0.5 mm						
<b>Gauge/Ends per 10cm</b>	1/12 - 47.2						
<b>Tufts per m2</b>	165,200 ± 5%						
<b>Backing Type</b>	Graphlex®						
<b>Wear Classification</b>	EN 1307 33 Heavy Contract						
<b>Radiant panel</b>	(EN ISO 9239/1) Euroclass CfI S1 (EN ISO 13501)						
<b>Dimensional Stability</b>	≤ 0.2% (ISO 2551 / EN 986)						
<b>Impact Sound Insulation (ΔLw)</b>	25dB (EN ISO 10140-3)						
<b>Rating of Sound Absorption</b>	α <sub>w</sub> 0.20 (EN ISO 11654)						
<b>Sound Absorption</b>	<b>125Hz</b>	<b>250Hz</b>	<b>500Hz</b>	<b>1000Hz</b>	<b>2000Hz</b>	<b>4000Hz</b>	(EN ISO 354)
	0.01	0.05	0.08	0.22	0.34	0.44	α <sub>s</sub>
<b>Style number</b>	3064000405			4m <sup>2</sup> - 16 Tiles per Box (50 cm x 50 cm ± 0.20%)			

EN 14041



DOP: 1037/118269  
textile floor covering  
EN 1307


DC5C8BA6  
www.pro-dit.it



install with TacTiles®



Interface Europe Ltd reserve the right to change or modify specifications

[www.interface.com](http://www.interface.com)



**Mission Zero:**  
our promise to eliminate any negative impact our company may have on the environment by the year 2020.